

EXCITO-B


5 Stage Ultrafiltration System based on "QM" Cartridge Type

EXCITO-B is a economical five stage, ultra-filtration water system, using a modern line of "QM - QUICK CONNECTOR MALE" water filter cartridges .

This Aquafilter professional water filtration system is economical and easy to use. Perfectly cleans the water from many types of water pollution, bacteria and some viruses. Innovative Aquafilter water filter cartridges "QM QUICK CONNECTOR MALE", based on "PUSH IN - PUSH OUT" for quick replacement, requiring no special tools or the use of additional sealants such as Teflon tape, are included .

This included ultra-filtration technology system removes contaminants from water of 0.02 microns including most bacteria and some viruses.

In each filter cartridge, Aquafilter uses innovative **BACINIX™** nanosilver technology, providing anti-bacterial protection.

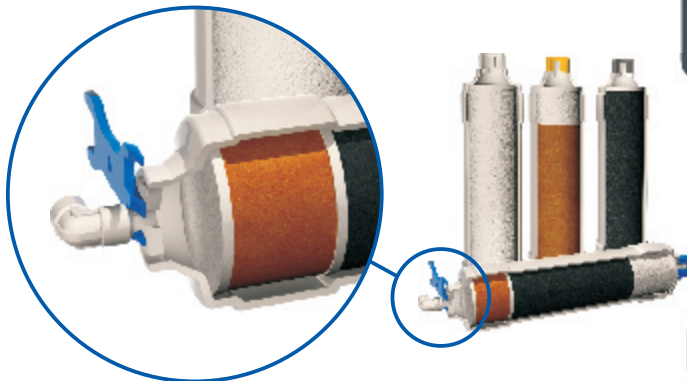

Cartridge set for EXCITO-B
EXCITO-B-CLR-CRT

UF membrane EXCITO-B
TLCHF-2T



Features:

- Five Stages of Filtration.
- Easy to install System Specification.
- Systems equip with modern faucet and all installation accessories.

Benefits:

- Competitive pricing.
- High quality.
- Fast product delivery.
- Innovative **BACINIX™** nanosilver technology, providing antibacterial protection.
- Made in EU.
- Compact, undercounter, and apartment size.
- Designed to remove contaminants of size 0.02 micron pore (capillary technology - ultra-filtration).
- Innovative inserts: a "QM" does not require the use of additional sealants.
- Manufactured from FDA CFR-21 compliant materials.

RECOMENDATIONS FOR USE:

- Point-of-Use (POU) systems can filter out bad tastes, colors or odors, which pose no health risk but still affect the water quality.
- This system will improve the flavor of water used for drinking and cooking.
- Perfect for almost any household and will easily fit into any space.
- Kitchen compact, undercounter, home and apartment size.
- Recommended for Families



EXCITO-B

5 Stage Ultrafiltration System
based on "QM" Cartridge Type



Additional accessories (included in EXCITO-B set)

Quick Connectors
Wrench




AQCWW-W

CATALOG#	STAGE	COMPONENT	FUNCTION
AIPRO-20M-QM	1	Sediment Spun-bounded polypropylene	Removes suspended impurities like particles, rust and sediment not less than 20 microns.
AISTRO-2-QM	2	Ion exchange High quality ion exchange resin	Step 1: Water hardness reduction. Step 2: Reducing the concentration of iron.
AICRO-3-QM	3	Carbon Cartridge Activated carbon coconut shell	The initial reduction of chlorine, pesticides, organic matter and improve the taste and odor of the water.
AICRO-4-QM	4	Carbon Cartridge & KDF® Activated carbon coconut shell with KDF®	Step 1: KDF® showing bacteriostatic capacity, protects against the development of other deposits of bacteria. Reduces the levels of iron and heavy metals. Step 2: Final reduction of chlorine, pesticides, organic substances and a final improved taste and odor of the water.
TLCHF-2T	5	Ultrafiltration (UF) membrane Ultrafiltration separation mechanism is commonly attributed to the pore size of the membrane as low as 0,02 micron	Rejects or separates high molecular weight solutes as well as suspended solids, colloids, and macromolecules, bacteria and some viruses.

BACINIX™ In each filter cartridge, Aquafilter uses innovative **BACINIX™** nanosilver technology, providing anti-bacterial protection.

Specifications:

Dimensions (H x W x L): 438 x 100 x 360 (mm)
 Connection adapter: 1/2"
 Working Temp.: 2°C - 45°C (36°F - 113°F)
 Flow rate: 1,9 l/m (0.6 gpm)
 Working Pressure: 3 bar (45 PSI)
 Tubing: Polyethylene 1/4"
 Faucet Type: FXFCH17-C
 Membrane element type: TLCHF-2T (ultrafiltration) UF
 Cartridge Type: AIPRO-20M-QM, AISTRO-2-QM, AICRO-3-QM, AICRO-4-QM, TLCHF-2T

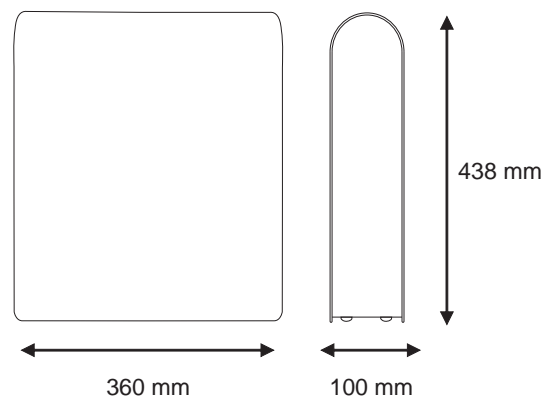

NOTE

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
- Water filtration systems can help reduce the presence of contaminants. In addition, some water filtration systems can help reduce the presence of microorganisms or other contaminants with potential health effects.
- We strongly recommend regularly scheduled maintenance and replacement of the filter cartridge in order for the product to perform properly.
- Replace the filter cartridge at least every 3 or 6 months (depending on water quality).
- Replace UF membrane at least every 6 or 12 months (depending on water quality).

LIMITED WARRANTY: AQUAFILTER warrants that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of five (5) years from the date of original purchase. This limited warranty does not apply to failures that result from abuse, misuse, alteration or failure to properly comply with installation or cartridge change instructions.